



*CAT. 6A Three Prongs Ping
 RJ45 Shielded Connector*



Specifications:

Material:

1. Housing and Insert: Polycarbonate, UL94V-2 - Transparent color.
2. Contact Terminal: Phosphor Bronze.
 Finished: 50 micro-Inch Gold Plating on contact area

Performance:






- Operation Temperature: -40°C to 80°C
- Cable to plug Tensile Strength: 7.7 kgs.
- Use: 23AWG solid wires

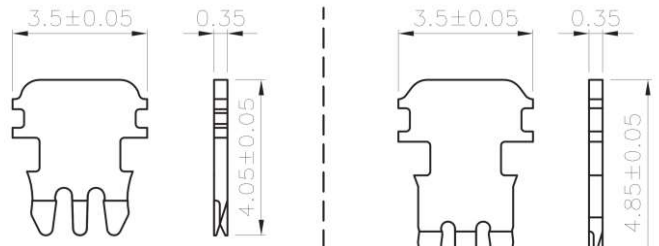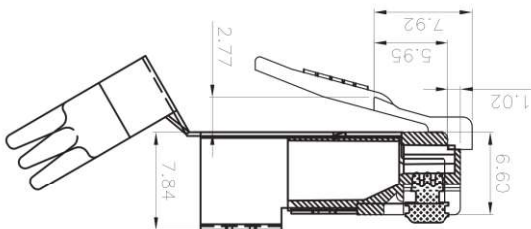

Three Prongs Pin

Three Prongs Pin

CONTACT TERMINAL
 SCALE 5/1

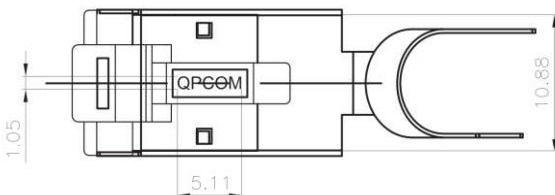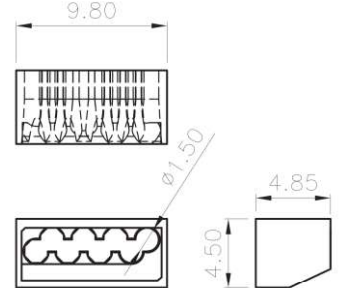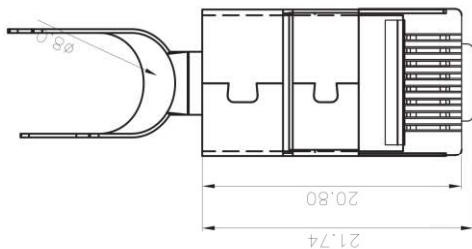

SCALE 5/1